



If you change your WiFi provider and/or password, or you notice that your tank level is not decreasing even if you are burning oil, you will need to “reconnect” your GREMLIN® so that it can send accurate tank readings to both you and us.

Before getting started, you will need to have your WiFi name (SSID) & WiFi password handy.



Step 1:


Open the GREMLIN® app and login.

Swipe down from the top of your screen to view the quick-access settings panel.

Tap the WiFi icon to turn WiFi OFF.

Swipe up to return to the GREMLIN® app.

From the GREMLIN® app, tap the menu icon on the top left side of your screen.

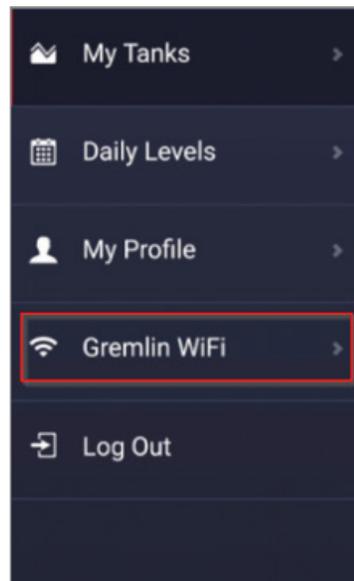

Step 2:

Tap “GREMLIN® WiFi” in the navigation menu.



Step 3:

You will be prompted to either press the button or touch the magnet to the notch on your monitor (depending on what type of monitor you have) until the light turns from green to red. Then, tap **Continue**.



Step 4:

You will now be prompted to connect to the GREMLIN®'s WiFi network.

Switch to your phone or tablet's **Home** screen.

From your Home screen, select **Apps > Settings**.




Step 5:

Under "Wireless and Networks" make sure Wi-Fi is turned on, then press **Wi-Fi**. Your device will automatically search for available Wi-Fi networks.

Tap the Wi-Fi network that begins with "PAYGO".


After you're connected, the words "Connected" will show under the network name and a WiFi icon  will appear in the upper-middle of your display.

NOTE: Some devices may receive a pop-up that states the access point is unsafe. Rest assured that the access point is safe! The monitor is an unknown device to the phone and is not connected to the internet, which is what triggers this notification.

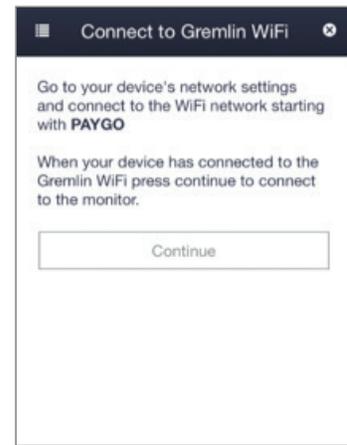

Step 6:


Return to the GREMLIN® app and tap **Continue**.

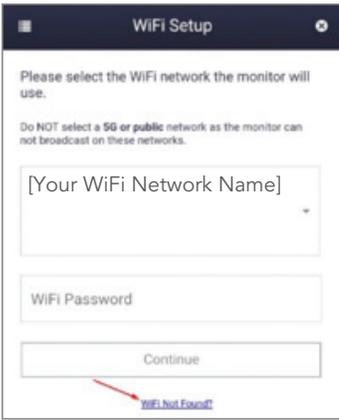

Step 7:

From the drop-down select your personal WiFi network and enter your network password. Tap **Continue**.


In some occasions your device may NOT detect nearby WiFi networks. In this case, click "WiFi Not Found?" on the bottom of the screen to enter your information manually. Once completed press **Continue**.

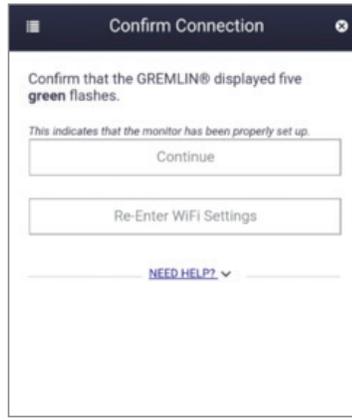

Step 8:

To confirm the connection, the GREMLIN® light should flash green 5 times. This may take a few seconds. Tap **Continue** after the 5 green flashes.

NOTE: If you do not see the 5 green flashes, tap **Re-Enter Wifi Settings** to start the process over. If you see red flashes, please refer to "GREMLIN® Flash Troubleshooting".

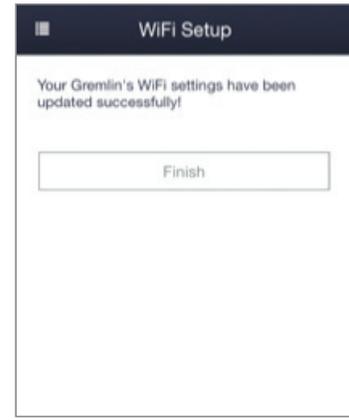

Step 9:

Once you have confirmed the connection, tap **Finish** to complete the process.

GREMLIN® FLASH TROUBLESHOOTING

Number of Red Flashes	Solution
1	Unable to find the WiFi network or WiFi setup incomplete, please reenter the WiFi Network name.
2	WiFi network unable to connect (i.e. poor signal, MAC filtering or sometimes incorrect password). For poor WiFi signal, reposition the network router or consider purchasing and adding a network range extender.
3	WiFi password incorrect. Check and reenter WiFi password.
4-9	Contact GREMLIN® support for further assistance.
Red & Green	Your GREMLIN® monitor successfully recieved a firmware update and is correctly connected to the network.